

# CUSTOMIZE YOUR FIT TO UNLOCK EVERY ADVANTAGE

The New Savage AccuFit™ system on the Model 110 series features adjustments for length of pull and comb height. They work together to offer a gunsmith-level quality of fit for every size hunter in every hunting scenario. Customize without compromise with the All-New Model 110 hunting rifles.

## ACCUFIT™ SYSTEM

### ADJUSTABLE COMB HEIGHT

Five comb risers allow you to set the perfect height for your body size and shooting preference.

- Adjustable 1/8" Increments



### FULLY ADJUSTABLE LENGTH OF PULL

Choose from four stock inserts to ensure the proper eye relief and establish a comfortable fit personalized to your body.

- Adjustable 1/4" Increments


## SIGHTING GUIDE BASICS

### ADJUST COMB



Select the comb riser that creates bone-to-stock contact aligning your line of sight parallel to the barrel. If the scope sightline features crescents, use a taller comb riser.

### ADJUST LENGTH OF PULL

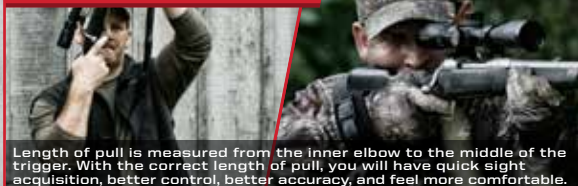

Length of pull is measured from the inner elbow to the middle of the trigger. With the correct length of pull, you will have quick sight acquisition, better control, better accuracy, and feel more comfortable.

### SIGHTING GUIDES



Too much eye relief;  
SHORTEN STOCK

Comb riser too low;  
TRY TALLER RISER

PROPER EYE RELIEF



## MODEL 110 WITH ACCUFIT

# **FITTING YOUR MODEL 110 WITH ACCUFIT™**

- 1. Remove screws (top and bottom) from buttstock with Phillips-head screwdriver.**
- 2. Remove recoil pad and factory insert.**
- 3. Slide comb riser towards back of gun, then pull up to remove.**
- 4. Select proper comb height (A-E) and length of pull insert (1-4).**
- 5. Align comb riser with grooves in stock and press straight down.**
- 6. Once all the way down, slide forward to remove any gaps between comb riser and stock.**
- 7. Attach proper length of pull insert to end of buttstock, groove will fit with stock and comb riser.**
- 8. Reattach recoil pad with the proper length screws to lock in both adjustments and your customized fit.**
- 9. Do not over-tighten screws.**

*Note:* We do not recommend installing more than one length of pull insert into your stock.

SCREW USAGE	
LENGTH OF PULL INSERT	SCREW LENGTH
NONE	1.25"
1	1.25"
2	1.50"
3	1.75"
4	2.00"

 **SAVAGE®**  
*BETTER COMES STANDARD.*